

# General Disposable Electrode

Safe & Efficient Energy Transmission



Promed's disposable electrosurgical electrodes—offered in blade, needle, and ball shapes—deliver precise cutting and coagulation. Available in various lengths with stainless steel or Teflon-coated shafts, and in over-molded or shrink-wrapped designs, they are fully compatible with standard monopolar pencils, ensuring accuracy, control, and dependable performance in every



*Overmold with Hex without Hex collar*




*Hex Collar with Shrink Wrap*



*Hex Collar with Shrink Wrap (High Insulation)*



*Shrink Wrap*

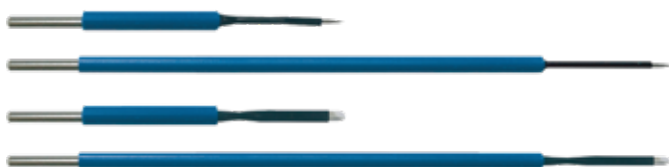

*Shrink Wrap (High Insulation)*



## Optional Finishing for Disposable Electrode



**Stainless Steel**
















**Teflon Coated**

## Disposable Blade Electrode

- Ø 2.36mm Shaft Diameter
- Packaged Sterile, 50pcs per Box
















		PRODUCT CODE	
PRODUCT DESCRIPTION	LENGTH (MM)	FINISHING-STAINLESS STEEL	OPTIONAL FINISHING-TEFLON COATING
Overmold with Hex, Standard Blade			
	69MM	EB22M2	EB22M2T
	153MM	EB26M2	EB26M2T
Hex Collar with Shrink Wrap			
	102MM	EB24P2	EB24P2T
	152MM	EB26P2	EB26P2T
Hex Collar with Shrink Wrap, High Insulation			
	69MM	EB22S2	EB22S2T
	102MM	EB24S2	EB24S2T
	152MM	EB26S2	EB26S2T
Shrink Wrap			
	69MM	EB22M2-H	EB22M2T-H
	102MM	EB24M2-H	EB24M2T-H
	152MM	EB26M2-H	EB26M2T-H
Shrink Wrap, High Insulation			
	69MM	EB22S2-H	EB22S2T-H
	102MM	EB24S2-H	EB24S2T-H
	152MM	EB26S2-H	EB26S2T-H

# Disposable Needle Electrode

- ∅ 2.36mm Shaft Diameter
- Packaged Sterile, 50pcs per Box
















		PRODUCT CODE	
PRODUCT DESCRIPTION	LENGTH (MM)	FINISHING-STAINLESS STEEL	OPTIONAL FINISHING-TEFLON COATING
Overmold with Hex, Standard Needle			
	69MM	EN22M2	EN22M2T
	153MM	EN26M2	EN26M2T
Hex Collar with Shrink Wrap			
	102MM	EN24P2	EN24P2T
	152MM	EN26P2	EN26P2T
Hex Collar with Shrink Wrap, High Insulation			
	69MM	EN22S2	EN22S2T
	102MM	EN24S2	EN24S2T
	152MM	EN26S2	EN26S2T
Shrink Wrap			
	69MM	EN22M2-H	EN22M2T-H
	102MM	EN24M2-H	EN24M2T-H
	152MM	EN26M2-H	EN26M2T-H
Shrink Wrap, High Insulation			
	69MM	EN22S2-H	EN22S2T-H
	102MM	EN24S2-H	EN24S2T-H
	152MM	EN26S2-H	EN26S2T-H

# Disposable Ball Electrode

- $\varnothing$  2.36mm Shaft Diameter
- Packaged Sterile, 50pcs per Box



			PRODUCT CODE	
PRODUCT DESCRIPTION	LENGTH (MM)	LENGTH (MM)	FINISHING-STAINLESS STEEL	OPTIONAL FINISHING-TEFLON COATING
Overmold with Hex, Standard Ball				
	3MM	69MM	ES22M3	ES22M3T
	5MM	71MM	ES22M4	ES22M4T
	3MM	133MM	ES26M3	ES26M3T
	5MM	136MM	ES26M4	ES26M4T
Hex Collar with Shrink Wrap				
	3MM	69MM	ES22S3	ES22S3T
	5MM	71MM	ES22S4	ES22S4T
	3MM	102MM	ES24S3	ES24S3T
	5MM	107MM	ES24S4	ES24S4T
	3MM	134MM	ES26S3	ES26S3T
	5MM	136MM	ES26S4	ES26S4T
Shrink Wrap				
	3MM	69MM	ES22M3-H	ES22M3T-H
	5MM	71MM	ES22M4-H	ES22M4T-H
	3MM	101MM	ES24M3-H	ES24M3T-H
	5MM	107MM	ES24M4-H	ES24M4T-H
	3MM	134MM	ES26M3-H	ES26M3T-H
	5MM	136MM	ES26M4-H	ES26M4T-H